

# AM4115T-DFRW

**Kód produktu:** AM4115T-DFRW



## Short Description

1.3 Megapixel resolution

620nm excitation and 650nm emission filter

20-220x magnification

To observe Cy5

## Popis

The Dino-Lite AM4115T-DFRW digital microscope is optimized for research and viewing fluorescent objects by using 620nm excitation LEDs. It has a long-pass type 650nm emission filter that is designed to observe a wide range of fluorophores with applications in developmental biology, pathology, and anatomy.



USB 2.0



Measurement  
functionality



Adjustable  
~20x-220x



Magnification  
lock



1.3 megapixel  
1280 x 1024



Fluorescent  
LEDs ~ 620nm



Standard working  
distance

The AM4115T-DFRW has the capability of switching the light source from the 620nm


excitation LEDs to the white LED, which is convenient for locating the object and obtaining an easy focus. All of these factors make the AM4115T-DFRW the smallest fluorescence microscope in the world, capable of many applications and visualizing a vast range of fluorescence.

» *Special models available on request.*

**Working distance/field of view/depth of field**

| MAGNIFICATION RATE                | working distance    | FIELD OF VIEW(X) | FIELD OF VIEW(Y) | DEPTH OF FIELD |
|-----------------------------------|---------------------|------------------|------------------|----------------|
| Listed values may differ slightly | * Without front cap |                  |                  | Unit = mm      |
| 20                                | 60.2                | 19.5             | 15.6             | 2.5            |
| 30                                | 33.5                | 13.0             | 10.4             | 1.8            |
| 40                                | 20.9                | 9.8              | 7.8              | 1.5            |
| 50                                | 13.9                | 7.8              | 6.3              | -              |
| 60                                | 9.7                 | 6.5              | 5.2              | -              |
| 70                                | 7.1                 | 5.6              | 4.5              | 1.0            |
| 80                                | 5.5                 | 4.9              | 3.9              | -              |
| 90                                | 4.5                 | 4.3              | 3.5              | -              |
| 100                               | 4.1                 | 3.9              | 3.1              | -              |
| 110                               | 4.0                 | 3.6              | 2.8              | -              |
| 120                               | 4.1                 | 3.3              | 2.6              | -              |
| 130                               | 4.5                 | 3.0              | 2.4              | -              |
| 140                               | 5.0                 | 2.8              | 2.2              | -              |
| 150                               | 5.6                 | 2.6              | 2.1              | -              |
| 160                               | 6.3                 | 2.4              | 2.0              | -              |
| 170                               | 7.1                 | 2.3              | 1.8              | -              |
| 180                               | 8.0                 | 2.2              | 1.7              | -              |
| 190                               | 8.9                 | 2.1              | 1.6              | -              |
| 200                               | 9.9                 | 2.0              | 1.6              | -              |
| 210                               | 10.9                | 1.9              | 1.5              | -              |
| 220                               | 11.9                | 1.8              | 1.4              | 0.1            |

**Special Light**

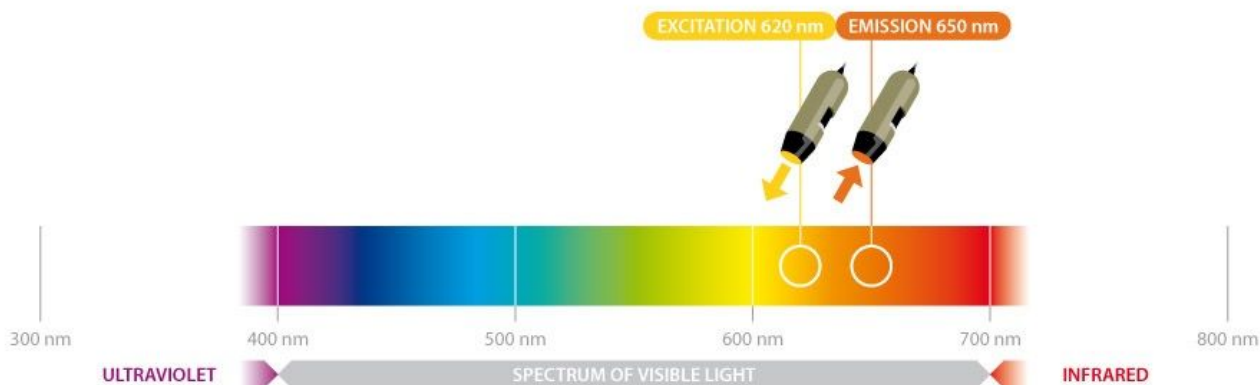

## Specifikace

| Lighting                          |                                                                       |
|-----------------------------------|-----------------------------------------------------------------------|
| Light/ LED type                   | 620nm excitation + white                                              |
| Number of LEDs                    | 7 FL + 1 White                                                        |
| LED on/off switchable:            | Yes                                                                   |
| Infrared filter                   | No                                                                    |
| Diffuser available                | No                                                                    |
| Emission filter                   | 650nm, LP                                                             |
| Polarizer                         | No                                                                    |
| Fluorophores                      | Cy5                                                                   |
| Optics                            |                                                                       |
| Magnification                     | 20x ~ 220x                                                            |
| Macro zoom                        | No                                                                    |
| Working distance                  | Standard                                                              |
| Lens type                         | Glass with anti-reflection coating                                    |
| Sensor                            |                                                                       |
| Sensor type                       | CMOS                                                                  |
| Resolution                        | 1.3 Megapixel (1280x1024)                                             |
| Maximum frame rate                | 30 fps                                                                |
| Compatibility                     |                                                                       |
| Interface                         | USB 2.0                                                               |
| Operating system                  | Windows 7, 8, 10 & 11, MacOS 10.9 and up                              |
| Software                          | DinoCapture 2.0 (Windows), DinoXcope (Mac OS)                         |
| Supported image formats (Windows) | BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX |
| Supported video formats (Windows) | WMV, FLV, SWF                                                         |
| Supported image formats (MacOS)   | JPEG, PNG                                                             |
| Supported video formats           | MOV                                                                   |

|                      |                                                                                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (MacOS)              |                                                                                                                                                              |
| Imaging standards    | DirectShow, UVC                                                                                                                                              |
| Housing              |                                                                                                                                                              |
| Housing material     | Composite/ plastic housing                                                                                                                                   |
| Magnification lock   | Yes                                                                                                                                                          |
| Dimensions           | 10.5cm (L) x 3.2cm (D)                                                                                                                                       |
| Weight               | 100g                                                                                                                                                         |
| Cable length         | 1.8m                                                                                                                                                         |
| Features             |                                                                                                                                                              |
| Special feature      | No                                                                                                                                                           |
| Measurement          | Yes                                                                                                                                                          |
| Calibration          | Yes                                                                                                                                                          |
| Microtouch sensor    | Yes                                                                                                                                                          |
| ESD safe             | No                                                                                                                                                           |
| Information          |                                                                                                                                                              |
| Package contents     | Microscope, carry pouch, calibration target, user manual, N3C-C (Close Cap) N3C-EB (Extended Open Black Cap) N3C-LB (Black Long Cap) N3C-OB (Black Open Cap) |
| Warranty information | 2 years European warranty                                                                                                                                    |
| Regulatory approval  | CE, FCC, ROHS                                                                                                                                                |
| Price range          | €700,00 - €900,00                                                                                                                                            |